




REPLACEMENT WINDOWS

# CA30WW CASEMENT

the **CORE**  
window & door platform products by VEKA

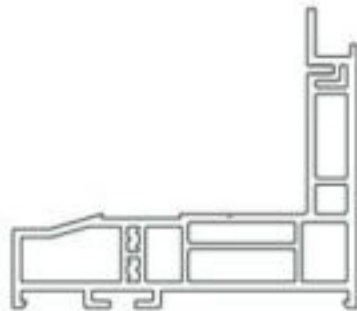

CA3001  
FRAME



PC02  
SASH

**THERMAKRAFT**



### MFG. LIMITATIONS

	Width
Minimum	*
Maximum	36"

	Height
Minimum	*
Maximum	72"

\* Minimum width and heights are determined by process machinery capabilities.

### BASELINE PERFORMANCE

#### Thermal Insulation

GLASS	Uc Value	R Value
Low-E/Argon/Dual	.27	3.70
Low-E/Argon/Triple	.22	4.55
Low-E/Krypton/Triple	.19	5.26

#### Structural Performance

Air Infiltration@ 25MPH	.08 cfm/ft <sup>2</sup>
Water Penetration	7.50 psf
Uniform Loads	+/- 75.0 psf

**AAMA RATING: C-R50**

### FEATURES & BENEFITS

- Impact rated Grade 50 performance.
- Continuous head and sill with integral mullion
- Multi-point lock system with easy crank operating handle.
- Up to 1" glazing.
- Double wall frame for less roll.
- Optional two piece field mulling system.
- Dual weatherstripping.
- Head drip fin for field mulling.
- One profile sash.
- Common profiles produce Casement, Awning and Picture Windows.
- Accessory options for Bay/Bow applications.



### ASSEMBLIES

